



13kVA Canopied Set



GENERAL

OUTPUT RATINGS

50Hz, 230/240 VOLT, SINGLE PHASE

YXP13 Prime

13kVA, 10kW

ENGINE MODEL

PERKINS

ALTERNATOR

LERROY SOMER



TECHNICAL DATA


Engine Model	403D-15G		1500 RPM
Cylinders	3	Fuel Cons: 100% Load (l/hr)	3.7
Cubic Capacity	1.49 Litres	Fuel Cons: 75% Load (l/hr)	2.8
Aspiration	Natural	Oil Capacity	6 Litres
Cooling	Water Cooled	Coolant Capacity	6 Litres
Fuel Tank Capacity	90 Litres	Cooling Air Flow	37.7 L/min

Rating Definitions

Prime / Continuous power: No limitation to annual hours of operation and these models can supply 10% overload for 1 in 12 hours.

Standby power: Ratings only applicable for supplying power in event of power failure. No overload is permitted on these ratings.

GENERAL ARRANGEMENT

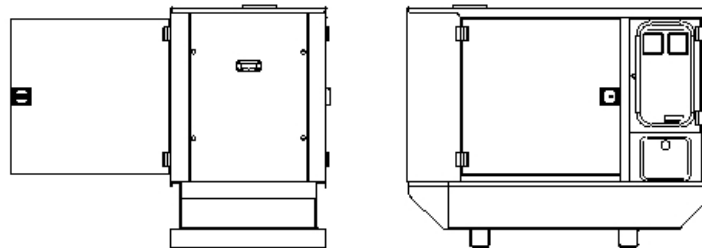

DIMENSIONS AND WEIGHTS

Length Mm	Width Mm	Height Mm	Weight Kg
1912	850	1250	876

Owing to our policy of continuous improvement, we reserve the right to amend specifications without notice. All ratings are at standard ISO conditions.

Registered Office:
Yorpower Limited
Unit 2 Hurricane Close
Sherburn In Elmet
LS25 6PB
UNITED KINGDOM



T: +44 (0) 1977 688155
F: +44 (0) 1977 688158
E: sales@yorpower.com
W: www.yorpower.com